


## The RF Line NPN Silicon Power Transistor 100W(PEP), 30MHz, 28V

M/A-COM Products Released - Rev. 07.07

Designed primarily for application as a high-power linear amplifier from 2.0 Product Image to 30 MHz.

- Specified 12.5 V, 30 MHz characteristics Output power = 100 W (PEP) Minimum gain = 10 dB Efficiency = 40%
- Intermodulation distortion @ 100 W (PEP) IMD = -30 dB (min.)
- 100% tested for load mismatch at all phase angles with 30:1 VSWR

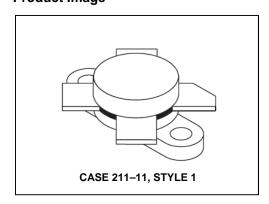

### MAXIMUM RATINGS

Rating	Symbol	Value	Unit	
Collector–Emitter Voltage	V <sub>CEO</sub>	20	Vdc	
Collector-Base Voltage	V <sub>CBO</sub>	45	Vdc	
Emitter-Base Voltage	V <sub>EBO</sub>	3.0	Vdc	
Collector Current — Continuous	Ic	20	Adc	
Withstand Current — 10 s	_	30	Adc	
Total Device Dissipation @ T <sub>C</sub> = 25°C Derate above 25°C	P <sub>D</sub>	290 1.66	Watts W/°C	
Storage Temperature Range	T <sub>stg</sub>	-65 to +150	°C	

## THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	R <sub>θJC</sub>	0.6	°C/W

## ELECTRICAL CHARACTERISTICS (T<sub>C</sub> = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Тур	Max	Unit
OFF CHARACTERISTICS	•		•	•	•
Collector-Emitter Breakdown Voltage (I <sub>C</sub> = 50 mAdc, I <sub>B</sub> = 0)	V <sub>(BR)CEO</sub>	20	_	_	Vdc
Collector-Emitter Breakdown Voltage (I <sub>C</sub> = 200 mAdc, V <sub>BE</sub> = 0)	V <sub>(BR)CES</sub>	45	_	_	Vdc
Collector-Base Breakdown Voltage (I <sub>C</sub> = 200 mAdc, I <sub>E</sub> = 0)	V <sub>(BR)CBO</sub>	45	_	_	Vdc
Emitter–Base Breakdown Voltage (I <sub>E</sub> = 10 mAdc, I <sub>C</sub> = 0)	V <sub>(BR)EBO</sub>	3.0	_	_	Vdc
Collector Cutoff Current (V <sub>CE</sub> = 16 Vdc, V <sub>BE</sub> = 0, T <sub>C</sub> = 25°C)	I <sub>CES</sub>	_	_	10	mAdc

(continued)

Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

• North America Tel: 800.366.2266 / Fax: 978.366.2266

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298 Visit www.macomtech.com for additional data sheets and product information.




## The RF Line NPN Silicon Power Transistor 100W(PEP), 30MHz, 28V

M/A-COM Products Released - Rev. 07.07

## ELECTRICAL CHARACTERISTICS - continued (T<sub>C</sub> = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Тур	Max	Unit
ON CHARACTERISTICS	•	•			
DC Current Gain (I <sub>C</sub> = 5.0 Adc, V <sub>CE</sub> = 5.0 Vdc)	h <sub>FE</sub>	10	70	_	_
DYNAMIC CHARACTERISTICS					
Output Capacitance (V <sub>CB</sub> = 12.5 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)	C <sub>ob</sub>	_	550	800	pF
FUNCTIONAL TESTS					
Common–Emitter Amplifier Power Gain (V <sub>CC</sub> = 12.5 Vdc, P <sub>out</sub> = 100 W, I <sub>C(max)</sub> = 10 Adc, I <sub>CQ</sub> = 150 mAdc, f = 30, 30.001 MHz)	GPE	10	12	_	dB
Collector Efficiency (V <sub>CC</sub> = 12.5 Vdc, P <sub>out</sub> = 100 W, I <sub>C(max)</sub> = 10 Adc, I <sub>CQ</sub> = 150 mA, f = 30, 30.001 MHz)	η	40	_	_	%
Intermodulation Distortion (1) (V <sub>CE</sub> = 12.5 Vdc, P <sub>out</sub> = 100 W, I <sub>C</sub> = 10 Adc, I <sub>CQ</sub> = 150 mA, f = 30, 30.001 MHz)	IMD	_	-33	-30	dB

1. To proposed EIA method of measurement. Reference peak envelope power.

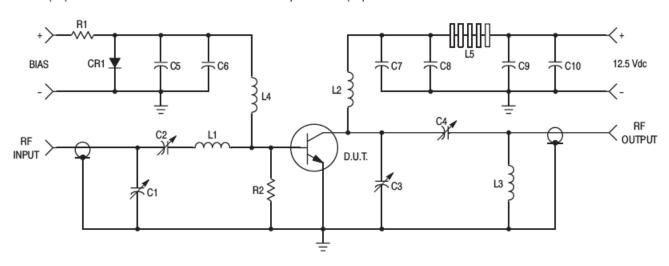

C1, C2, C4 - 170-780 pF, ARCO 469

C3 - 80-480 pF, ARCO 466

C5, C7, C10 - ERIE 0.1 µF, 100 V

C6 - MALLORY 500 µF @ 15 V Electrolytic

C9 - 100 µF, 15 V Electrolytic

C8 - 1000 pF, 350 V UNDERWOOD

R1 - 10 Ω, 25 Watt Wirewound

R2 - 10 Ω, 1.0 Watt Carbon

CR1 - 1N4997

L1 - 3 Turns, #16 Wire, 5/16" I.D., 5/16" Long

L2 - 12 Turns, #16 Enameled Wire Closewound, 1/4" I.D.

L3 - 1-3/4 Turns, 1/8" Tubing, 3/8" I.D., 3/8" Long

L4 - 10 μH Molded Choke

L5 - 10 Ferrite Beads - FERROXCUBE #56-590-65/3B

Figure 1. 30 MHz Test Circuit Schematic

Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298 Visit www.macomtech.com for additional data sheets and product information.



# The RF Line NPN Silicon Power Transistor 100W(PEP), 30MHz, 28V

M/A-COM Products Released - Rev. 07.07

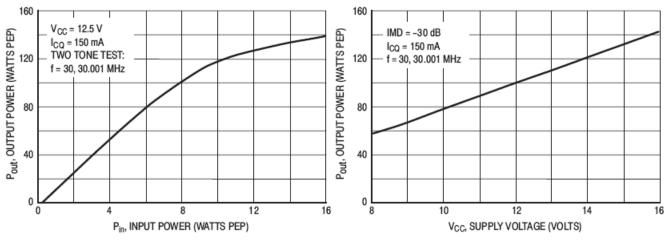


Figure 2. Output Power versus Input Power

Figure 3. Output Power versus Supply Voltage

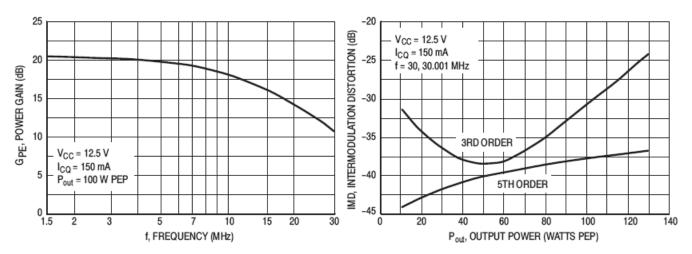


Figure 4. Power Gain versus Frequency

Figure 5. Intermodulation Distortion versus Output Power

• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
 Visit www.macomtech.com for additional data sheets and product information.

## **MRF421**



# The RF Line NPN Silicon Power Transistor 100W(PEP), 30MHz, 28V

M/A-COM Products Released - Rev. 07.07

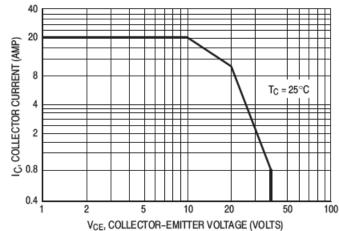


Figure 6. DC Safe Operating Area

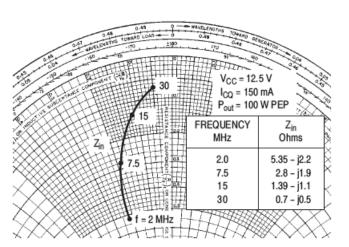


Figure 7. Series Equivalent Impedance

<sup>•</sup> Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
Visit www.macomtech.com for additional data sheets and product information.



## The RF Line NPN Silicon Power Transistor 100W(PEP), 30MHz, 28V

M/A-COM Products Released - Rev. 07.07


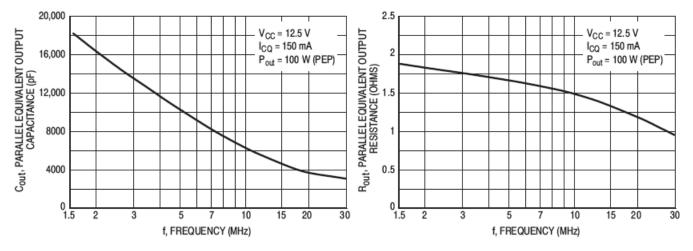


Figure 8. Output Capacitance versus Frequency

Figure 9. Output Resistance versus Frequency

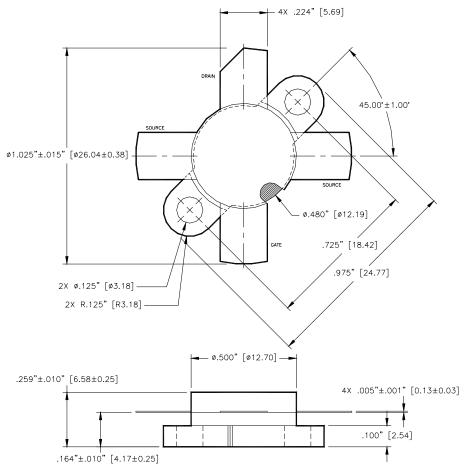

Unless otherwise noted, tolerances are inches  $\pm .005$ " [millimeters  $\pm 0.13$ mm]

• North America Tel: 800.366.2266 / Fax: 978.366.2266

Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300