

## Features

- Time saving rapid termination by use of crimping contacts
- for hoods/housings in the Han<sup>®</sup> B HMC series
- Han E<sup>®</sup> HMC contacts available with special HMC gold plating for 10,000 mating cycles

## Technical characteristics


Number of contacts	6, 10, 16, 24
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Insulation resistance	>10 <sup>10</sup> Ω
Limiting temperature	-40 ... +125 °C
Mating cycles with other HMC components	≥10000
Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant

## Derating

### Current carrying capacity


The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques acc. to IEC 60512-5-2

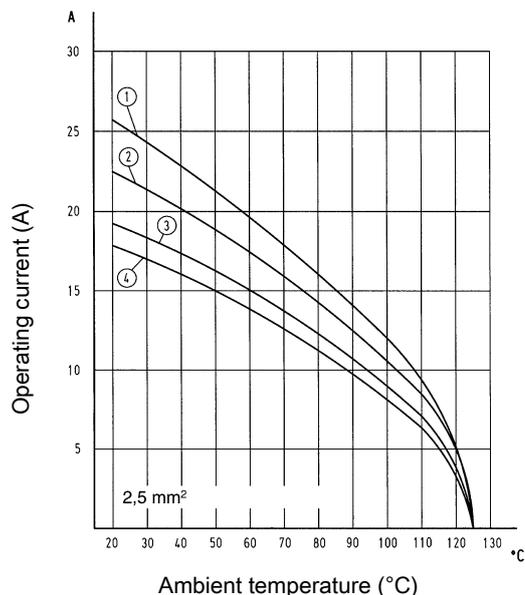

- ① Han<sup>®</sup> 6 E HMC
- ② Han<sup>®</sup> 10 E HMC
- ③ Han<sup>®</sup> 16 E HMC
- ④ Han<sup>®</sup> 24 E HMC

## Derating

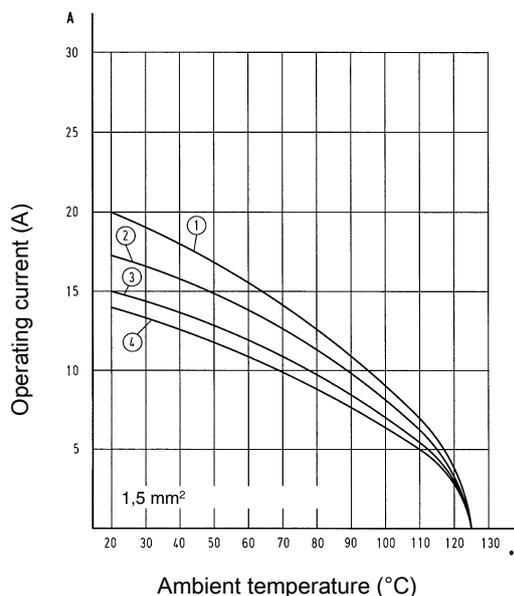

- ① Han<sup>®</sup> 6 E HMC
- ② Han<sup>®</sup> 10 E HMC
- ③ Han<sup>®</sup> 16 E HMC
- ④ Han<sup>®</sup> 24 E HMC

## Specifications and approvals

EN 60664-1  
IEC 61984  
DNV GL