



Emergency pull-wire switch

ZS 71 2Ö/1S WVD / 100 N

Material no.: 1185001 (material no. old: 71942904)


Product features

- Metal enclosure
- 3 contacts
- Compact design
- Wire length up to 35 m
- Spring force variant: 100 N
- Release by push button (VD)
- Wire pull and breakage detection
- Watertight collar W for protection against penetration of dirt

Notes

- At 3 m distance intermediate wire supports are required. One wire thimble is provided.

Dimensions

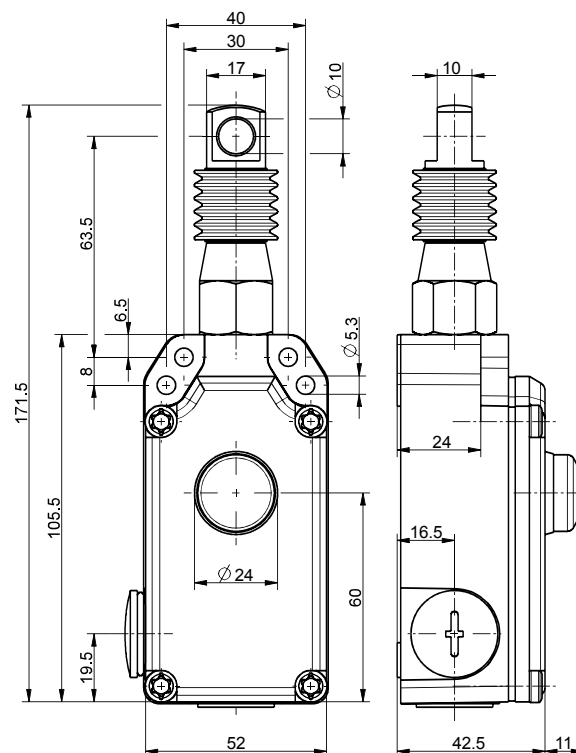

Technical data

Applied standards

EN 60947-5-1, EN 60947-5-5, EN ISO 13850, EN ISO 13849-1

Enclosure

aluminium die-cast, powder-coated

Cover

thermoplastic, glass-fibre reinforced, shockproof, self-extinguishing UL 94 V-0

Degree of protection

IP65 (IEC/EN 60529)

B_{10d} (10 % load)

100 000

T_M

max. 20 years

Contact material

silver

Switching system

snap action, positive break NC contacts $\ominus$

Switching elements

2 NC/1 NO contact, type Zb

Connection

screw connection terminals

Cable cross-section

min. 0.5 mm², max. 2.5 mm² (incl. conductor ferrules)

Stripping length

6 mm

Cable entry

2 x M20 x 1.5

Rated impulse withstand voltage U_{imp}

6 kV

Rated insulation voltage U_i

400 V

Conventional thermal current I_{the}

2 A

Utilisation category

AC-15

Rated operating current/voltage I_e/U_e

2 A/250 VAC

Errors and omissions excepted.



Emergency pull-wire switch ZS 71 2Ö/1S WVD / 100 N Material no.: 1185001 (material no. old: 71942904)

Technical data (contd.)

Short-circuit protection

2 A gG/gN fuse

Ambient temperature

-25 °C ... +70 °C

Mechanical life

> 100 000 operations

Max. wire length

35 m


Approvals



Weight

368 g

Switching diagram

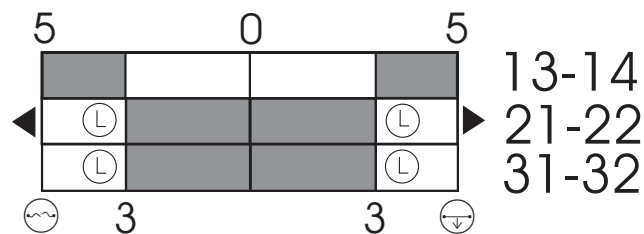

- Ⓛ Latching point
- ⊖ Wire breakage detection
- ⊕ Wire pull detection

Contact diagram

