


Modular Jack Horizontal Plastic 6PxC Tab Up WR-MJ

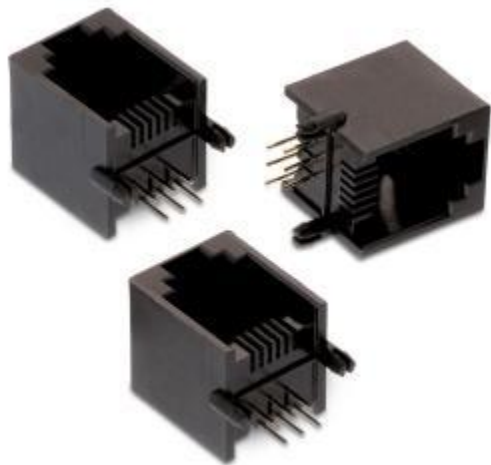

MATERIAL	
Quality Class	500 Mating cycles
Contact type	Stamped
Colour	Black
Insulator	PBT
Contact plating	Gold
Contact material	Copper alloy
Flammability rating	UL94-V0
SOLDERING	
Solder temperature	JEDEC lead free wave soldering
PACKAGING	
Packaging	Tray

ENVIRONMENTAL	
Compliance	Lead free and RoHS
Operating temperature	-40 °C up to +85 °C
UL / cULus	E324776
ELECTRICAL	
Working voltage	120 V (AC)
Dielectric withstanding voltage	1000 VAC/ min
Rated current	1.5 A
Contact Resistance	20 mΩ max.
Isolation resistance	>500 MΩ

Order Code	Pins	Colour	UL / cULus	Description	Gender
615 002 138 421	6P2C	Black	E324776	Modular Jack Horizontal Plastic 6PxC Tab Up WR-MJ	female
615 004 138 421	6P4C	Black	E324776	Modular Jack Horizontal Plastic 6PxC Tab Up WR-MJ	female
615 006 138 421	6P6C	Black	E324776	Modular Jack Horizontal Plastic 6PxC Tab Up WR-MJ	female